


# HOTSOAK 81

AQUATIC

**HOTSOAK SERIES** MODEL # A16060CSVFDSHS (FRONT DRAIN & CORNER SEAT)

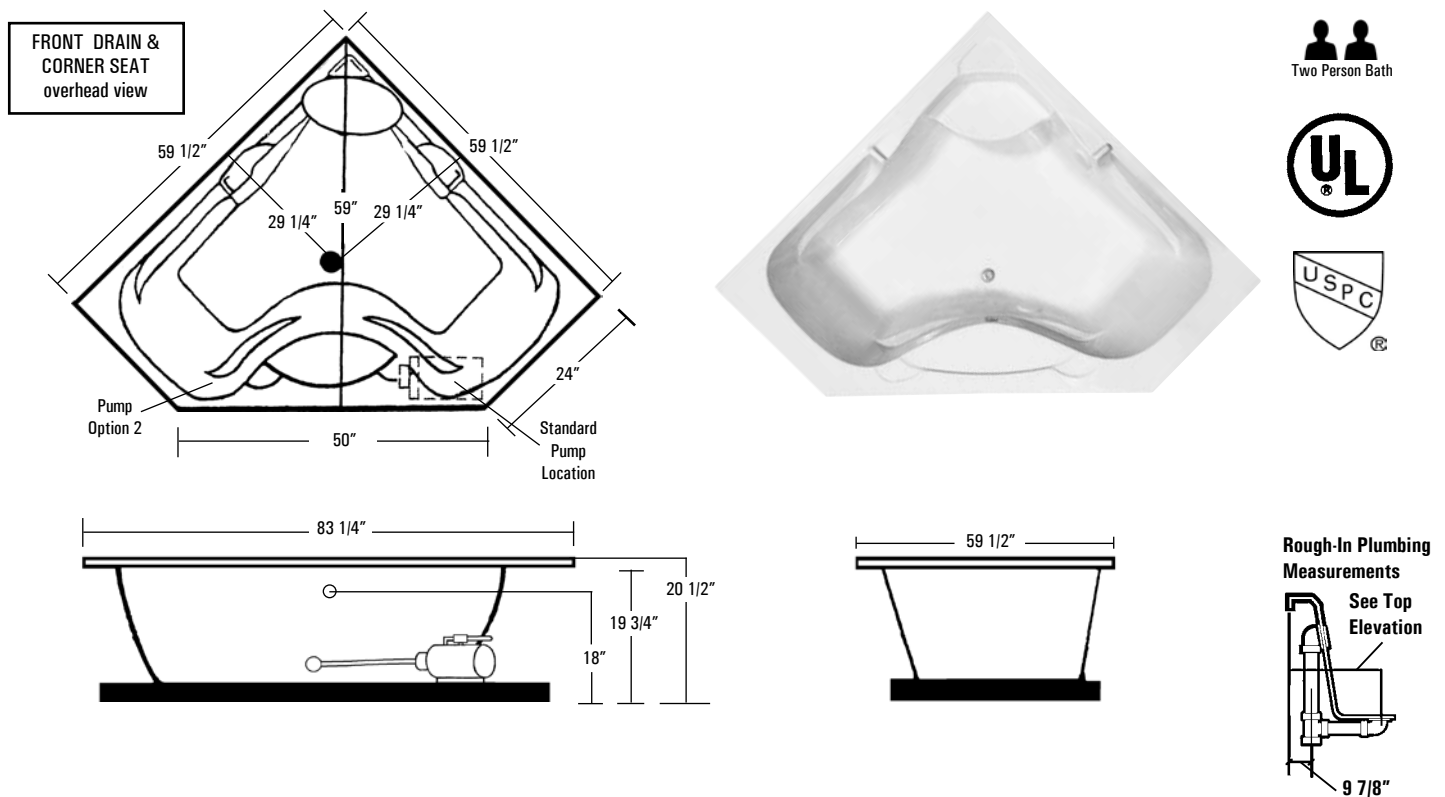

## SPECIFICATIONS:

### GENERAL SPECIFICATIONS:

Tub Size	59 1/2" x 59 1/2" x 20 1/2"
	151 cm x 151 cm x 52 cm
Bathing Well	41 1/2" long
	17 1/2" wide
	19 3/8" interior depth
Shipping Weight	226 lbs. / 103 kg
Tub Weight Filled	927 lbs. / 420 kg
Tub Only Weight	133 lbs. / 60 kg
Gallons to Overflow	89 gal. / 337 L

### ELECTRICAL SPECIFICATIONS:

Pump	1/15 HP; 1.3 AMP; 110V
Heater	1.5 kW; 12.5 AMP; 110V
Requirements	20 AMP; 110V, separate circuit required protected w/ Class A GFCI

### STANDARD EQUIPMENT:

#### Aquatic Quality Features:

- 1.5 kW Inline Maintenance Heater
- Run-Dry Pump with 20-Minute Timer
- 2 Circulation Portal Covers
- Bath-Side On/Off Electronic Button
- "Quiet Pad" Anti-Vibration Pump Mount for Quiet Operation
- Slip Resistant Floor
- 4 Arm Rests
- Extra Deep and Long Bathing Well
- Pre-leveled ABS Support Base
- 2 Integrally Molded Safety Grasps
- Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
- Durable, Easy to Clean, Lucite® Cast Acrylic Surface
- Available in 8 Standard No-Charge Colors

**UL & IAPMO Listed, Factory Tested Limited Lifetime Warranty**

### OPTIONAL EQUIPMENT:

- Comfort Pillow - Oval or Rectangle
- Bolt-On Grab Bars
  - White, Biscuit, Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Lift & Turn Waste and Overflow
  - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
  - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- Factory Installed Rigid ABS Tile Flange
- Optional Pump Location
- Color Matched Neo-Angle Acrylic Skirt
- Premium Colors

*All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.*

**Fax-On-Demand Document #1256**

