



No alternate pump location available.




* Shown with Fast-Fill Waterfall Spout.

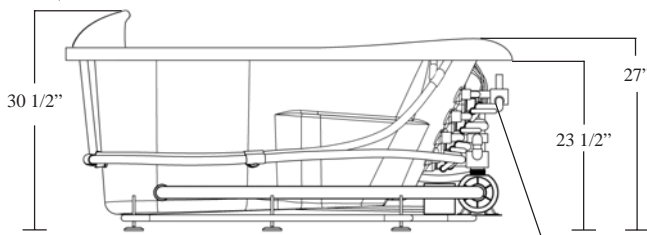

NOTE: Please allow for plumbing to extend approx. 3" beyond tub rim.

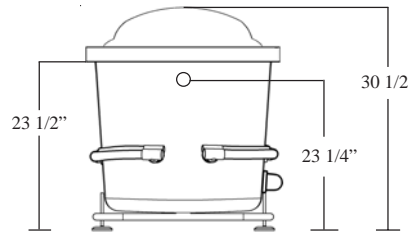

Rough-In Plumbing Measurements



Note: Infinity IX is not a drop in model. A deck must be built around the tub.

SPECIFICATIONS:

Infinity IX.tif

General Specifications:

Tub Size	66" x 34 1/2" x 31 1/2"
	168 cm x 88 cm x 78 cm
Bathing Well	40 1/2" long
	21" wide
	22 1/2" interior depth
Maximum Water Depth	18"
Shipping Weight	289 lbs. / 131 kg
Tub Weight Filled	931 lbs. / 406 kg
Tub Only Weight	192 lbs. / 87 kg
Gallons to Overflow	89 gal. / 336 L
Gallons to Operate	65 gal. / 246 L

Electrical Specifications:

Pump	2 HP; 12 AMP; 110V
Inline Heater	1.5 kW; 12.5 AMP; 110V
Requirement	1-15 AMP 2 pole, separate circuit required protected with Class A GFCI
Blower	1 HP; 10.5 AMP; 110V
Requirement	1-15 AMP 1 pole, separate circuit required protected with Class A GFCI

This whirlpool will need to be hard wired to the breaker box. Three outlets will be supplied on the whirlpool.

***This unit is not recommended for shower installations.**

This unit has a 3/4" female waterfall fill spout connection.

STANDARD EQUIPMENT:

- **16 Hydrotherapy Jets including:**
 - 12 Shiatsu Back Jets
 - 2 Rotary Massage Foot Jets
 - 2 Full Size Pressure-Flo Hydrotherapy Jets
- **Air Bath System:**
 - 1 HP Variable Speed Air Blower with 20-Minute Timer
 - Electronic Control Panel
 - Automatic Purge and Dry Cycle
 - 600 Watt Air Heating System
- **Aquatic Quality Features:**
 - 2 HP Run-Dry Pump
 - 1.5 kW Inline Maintenance Heater
 - "Quiet Pad" Anti-Vibration Pump Mount for Quiet Pump Operation
 - Shiatsu Electronic Control Panel with Preprogrammed Jet Sequencer
 - Bath-Side Electronic Control Panel with Temperature Display
 - Pulsating Neck Jet Pillow
 - Reclining Lounge Seat and 2 Arm Rests
 - Integrally Molded Fast-Fill Waterfall Spout (valves not included)*
 - Chromotherapy LED Lighting
 - Slip Resistant Floor
 - Adjusta-Level Base
 - Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
 - Durable, Easy to Clean, Lucite® Cast Acrylic Surface
 - Available in 8 Standard No-Charge Colors
- **UL & IAPMO Listed, Factory Tested**
- **Limited Lifetime Warranty**

OPTIONAL EQUIPMENT:

- Available without Fast-Fill Waterfall Spout -- See Price List for Details
- Jet Finish
 - Chrome, Polished Brass, Gold, Polished Nickel or Satin Nickel
- Control Panel Trim
 - White, Biscuit, Chrome, Polished Brass, Satin Nickel, Polished Nickel, Oil Rubbed Bronze or Clear
- Lift & Turn Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- Hand Held Jet
- Decorative Rim Kit -- Chrome or Polished Brass
- Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

Fax-On-Demand Document # 1165

